

AVFL6030 L/R
 AVFL6032 L/R
 AVFL6034 L/R
 AVFL6632 L/R
 AVFL6634 L/R
 AVFL6636 L/R
 AVFL7232 L/R
 AVFL7236 L/R

VENCO

| MODEL | A | B | C | D | E | F | G |
|--------------|---|-----------|--------------------------------------|---------------------------------------|----------|---------------------------------------|---------------------------------------|
| AVFL6030 L/R | 59 ³ / ₄ 1518 mm | 30 762 | 9 230 | 14 ³ / ₄ 362 | 4 102 | 14 ¹ / ₂ 368 | 13 ³ / ₄ 349 |
| AVFL6032 L/R | 59 ³ / ₄ 1518 mm | 32 813 | 9 230 | 14 ³ / ₄ 375 | 4 102 | 16 ¹ / ₂ 419 | 15 381 |
| AVFL6034 L/R | 59 ³ / ₄ 1518 mm | 34 865 | 9 230 | 16 407 | 4 102 | 15 ¹ / ₂ 394 | 15 381 |
| AVFL6632 L/R | 65 ¹ / ₂ 1664 mm | 32 813 | 9 230 | 15 381 | 4 102 | 17 432 | 16 ¹ / ₂ 419 |
| AVFL6634 L/R | 65 ³ / ₄ 1671 mm | 34 865 | 9 230 | 15 ¹ / ₂ 394 | 4 102 | 17 432 | 16 ¹ / ₂ 419 |
| AVFL6636 L/R | 65 ³ / ₄ 1671 mm | 36 915 | 9 ³ / ₄ 248 | 17 ³ / ₄ 438 | 4 102 | 17 ¹ / ₂ 445 | 16 ³ / ₄ 425 |
| AVFL7232 L/R | 71 ³ / ₄ 1823 mm | 32 813 | 9 230 | 14 ³ / ₄ 375 | 4 102 | 17 ¹ / ₂ 445 | 17 432 |
| AVFL7236 L/R | 71 ³ / ₄ 1823 mm | 36 915 | 9 230 | 17 ¹ / ₂ 445 | 4 102 | 17 ¹ / ₂ 445 | 16 ¹ / ₂ 419 |

Specifications

Venco acrylic bathware is manufactured from .125 gauge solid acrylic sheet, reinforced with heavy-duty fiberglass to provide a sanitary, unbroken, smooth surface. Reinforcing and contouring gives added strength. Venco bathware is warranted against factory defects for five years.


All product measurements are to the outside of flange. Measurements plus (+) or minus (-) 1/4".

All Venco Products are Canadian Standards Association certified



VENCO

7584 Vantage Place, Delta, BC V4G 1A5
 Phone (604) 940-4960 • Fax (604) 940-9733
 email: venco@telus.net
 www.venco.ca

TOP VIEW R.H. MODEL

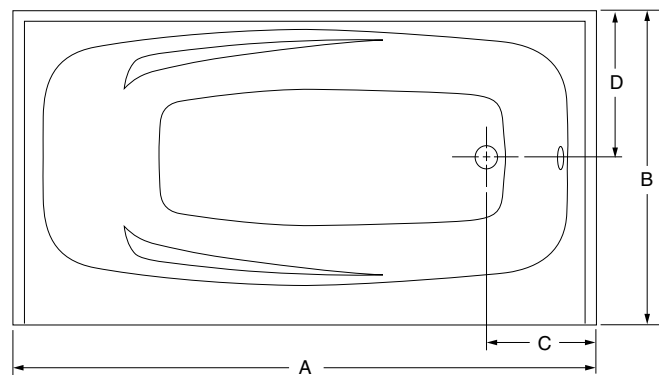

END VIEW

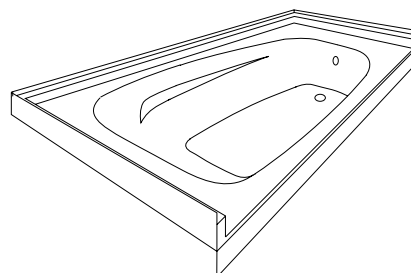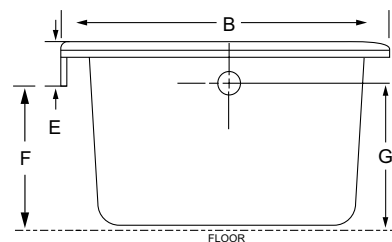

Water Capacity (Imperial Gallons)

| MODEL | Minimum | Maximum |
|--------------|---------|---------|
| AVFL6030 L/R | 22 | 40 |
| AVFL6032 L/R | 25 | 40 |
| AVFL6034 L/R | 28 | 45 |
| AVFL6632 L/R | 30 | 48 |
| AVFL6634 L/R | 30 | 48 |
| AVFL6636 L/R | 33 | 52 |
| AVFL7232 L/R | 35 | 55 |
| AVFL7236 L/R | 38 | 60 |